




MULTI-ZONE SERIES


Mix and Match Systems condition up to five rooms

Indoor Ceiling Unit

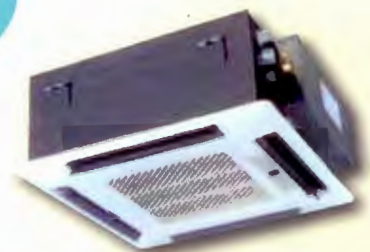

Multi-Zone Heat Pumps 18,000 to 42,000 BTUH

Mix and match high wall mount and/or ceiling cassette indoor units to best meet comfort requirements

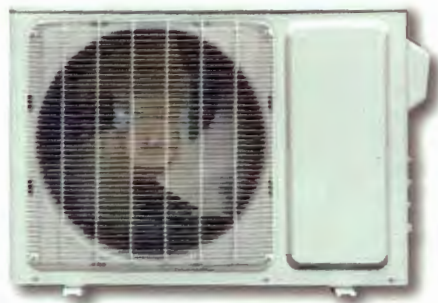

Outdoor Unit



Indoor Unit



For cassette; also with wired wall thermostat



For high wall mount

Our Multi-Zone units let you condition one up to five rooms with just one outdoor unit (depending on model). The contractor can design a system that best meets the load requirements of each room being conditioned because indoor air handlers can be mixed and matched—including high wall mount units and ceiling cassettes in the same installation.

A single outdoor condenser is sized for multiple indoor air handlers. These 9,000, 12,000, 18,000 and 24,000 BTUH indoor units can be mixed, up to the point that their combined capacity reaches the total allowable system capacity—see the chart on page 3. All units must operate in the same mode except fan only can always be selected. Indoor units are a subtle white color; ceiling cassettes have an attractive white panel.

Multi-Zone models incorporate all the advantages of twin rotary inverter compressor technology. The compressor speed is variable, depending on the load demand. Most of the time the unit runs at low frequency, saving energy while maintaining comfort, but ramping up to higher frequency when needed. Temperature fluctuations and compressor on/off cycling are eliminated, and indoor air quality is enhanced because air is constantly being pulled through the filter and dehumidified.

True zone control is possible because each air handler operates independently. Multi-Zone systems are also great for larger spaces such as fellowship halls and commons areas: install one or more units for quiet, efficient, easily controlled comfort.

Features

- **Auto Swing**—Continually adjusts air direction for a gentle, breeze-like effect preferred by most people
- **Multiple Modes**—Cooling, heating, fan only, dehumidification only, plus:
 - Sleep mode • 24-hour timer
 - Turbo mode • Auto mode
- **Intelligent Pre-Heating**—Enhances comfort by preventing cold air blow
- **Auto Operation**—Automatically selects the mode required to maintain a constant temperature/humidity level
- **“Follow” Function**—Remote senses temperature at its location and adjusts air flow for comfort and efficiency
- **Superior Filtration**—Silver ion air filter releases silver ions that eliminate bacteria in the air; gold fin evaporator coating on high wall mount units and blue fin coating on ceiling cassettes inhibit bacterial growth
- **Auto Defrost**—Defrosts only when necessary to save energy, limit downtime
- **Self-Clean Mode**—Dries out indoor unit when not in use to prevent mold growth
- **Low Ambient Operating Range**—Cooling 23° - 118.5° F, heating 5° - 80.5° F





Mix and match indoor units up to the maximum BTUHs allowed for each system—see chart on following page for matches.

Order outdoor and indoor units separately:

“A” indicates outdoor unit and “B” indicates indoor units.

For instance, a 36,000 BTUH tri-zone might consist of one A-KFH36QA-1, two B-KFH12MA-1 and one B-KFH12CA-1.

* Always follow local, state and national electrical codes. Main power connection is 208-230V.

Recommended Indoor/Outdoor Connecting Cable (SJOW)— 14 AWG / 4 conductor 600V THHN unshielded stranded bare copper, not to exceed 98 feet between indoor and outdoor units.

- ¹ For single indoor unit installation; min. 10 ft. line set length recommended.
- ² Oil traps should be installed every 16.5 to 23 feet (5-7m) when the outdoor unit is installed above the indoor unit.

Ambient Operating Temperature Range:
23° - 118.5° F (cooling);
5° - 80.5° F (heating)

Warranty—6 years compressor, 2 years on parts
(Some limitations apply; see printed warranty for details.)



**See the IOM regarding various adapters and fittings included with outdoor and/or indoor models for making connections.

OUTDOOR UNITS

FEATURES	A-KFH18DA-1	A-KFH24TA-1	A-KFH30QA-1	A-KFH36QA-1	A-KFH42PA-1
Power Supply	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60
System Cooling Cap. (BTUH)	18,000	26,000	29,000	34,000	40,000
Min./Max. Cooling Cap. (BTUH)	7,000/21,000	7,500/33,000	7,500/34,000	8,530/34,120	8,530/46,403
SEER/EER	16.00/ 10.20	16.00/ 8.20	16.0/ 7.30	16.0/ 7.90	16.0/ 9.30
HSPF	8.20	8.20	8.20	8.20	8.00
High Heating (BTUH) @ 47°F	19,000	29,000	30,400	35,800	44,500
Low Heating (BTUH) @ 17°F	9600	17,000	16,500	22,000	24,800
Min./Max. Heating Cap. (BTUH)	8,530/22,600	7,500/35,000	7,500/36,000	10,663/40,944	10,662/47,768
Sound Pressure (dBA)	56	56	56	59	58

OUTDOOR UNIT DIMENSIONS

	A-KFH18DA-1	A-KFH24TA-1	A-KFH30QA-1	A-KFH36QA-1	A-KFH42PA-1
Width (inches)	35 ³ / ₈	37 ¹ / ₄	37 ¹ / ₄	36 ¹ / ₄	40
Height (inches)	23 ¹ / ₂	27 ⁵ / ₈	27 ⁵ / ₈	31	43 ⁷ / ₁₆
Depth (inches)	14 ⁷ / ₈	15 ⁵ / ₈	15 ⁵ / ₈	16 ¹³ / ₁₆	17 ⁵ / ₁₆
Net Wt/Shipping Wt (lbs.)	95/106	135/146	137/148	153/165	225/247

ELECTRICAL DATA OUTDOOR UNIT*

	A-KFH18DA-1	A-KFH24TA-1	A-KFH30QA-1	A-KFH36QA-1	A-KFH42PA-1
Main Power Connection	Outdoor Unit	Outdoor Unit	Outdoor Unit	Outdoor Unit	Outdoor Unit
Min. Circuit Ampacity	13A	20A	26A	28A	29A
Max. Fuse/HACR Circuit Breaker	20A	30A	45A	45A	50A

REFRIGERANT CONNECTIONS & LINE SET LENGTHS

	A-KFH18DA-1	A-KFH24TA-1	A-KFH30QA-1	A-KFH36QA-1	A-KFH42PA-1
	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"
	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"
Liquid O.D. (flare) (inch)**	—	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	1/4" - 1/2"
Suction O.D. (flare) (inch)**	—	—	1/4" - 3/8"	3/8" - 5/8"	1/4" - 1/2"
	—	—	—	—	3/8" - 5/8"
Maximum Line Set Length ¹	33 feet	33 feet	33 feet	82 feet	82 feet
Max. Total Length All Zones	98 feet	172 feet	230 feet	210 feet	262 feet
Maximum Elevation (outdoor) ²	25 feet	25 feet	25 feet	49 feet	49 feet

**See the IOM regarding various adapters and fittings included with outdoor and/or indoor models for making connections.
NOTE: Maximum line set length varies based on number of indoor units installed. See IOM for details.

HIGH WALL MOUNT INDOOR UNITS

CEILING CASSETTES

FEATURES	B-KFH09MA-1	B-KFH12MA-1	B-KFH18MA-1	B-KFH12CA-1	B-KFH18CA-1	B-KFH24CA-1
Cooling Capacity BTUH	9,000	12,000	18,000	12,000	14,400	22,800
Heating Capacity BTUH	9,800	13,000	19,000	13,000	16,000	27,400
Air Flow Range (CFM)	224 - 430	224 - 453	282 - 588	265-294-353	265-294-353	500-559-694
Fan Speeds	7	7	7	3	3	3
Dehumidification (Pts/Hr)	1.69	2.96	3.80	2.96	3.80	5.28
Sound Level Range (dBA)	21 to 42	22 to 43	33 to 51	42/44/46	42/44/46	35/37/39
Temperature Setting	On Remote: 61°F - 86°F			On Remote or Wired Wall Thermostat		

AIR DIRECTION

	B-KFH09MA-1	B-KFH12MA-1	B-KFH18MA-1	B-KFH12CA-1	B-KFH18CA-1	B-KFH24CA-1
Horiz./Vert. Modulating	Yes	Yes	Yes	No	No	No
Four-Way Modulating	Yes	Yes	Yes	Yes	Yes	Yes

DIMENSIONS

	B-KFH09MA-1	B-KFH12MA-1	B-KFH18MA-1	B-KFH12CA-1		B-KFH18CA-1		B-KFH24CA-1	
Width (inches)	34 ¹ / ₁₆	34 ¹ / ₁₆	40 ¹ / ₁₆	22 ⁷ / ₁₆	25 ⁵ / ₈	22 ⁷ / ₁₆	25 ⁵ / ₈	33 ¹ / ₁₆	37 ¹ / ₁₆
Height (inches)	11 ¹ / ₂	11 ¹ / ₂	9	22 ⁷ / ₁₆	25 ⁵ / ₈	22 ⁷ / ₁₆	25 ⁵ / ₈	33 ¹ / ₁₆	37 ¹ / ₁₆
Depth (inches)	8 ¹ / ₄	8 ¹ / ₄	12 ⁹ / ₁₆	9 ¹ / ₁₆	2	9 ¹ / ₁₆	2	9 ¹ / ₁₆	2 ³ / ₈
Net Wt/Shipping Wt (lbs)	24.25/30.9	24.25/30.9	30.9/41.9	39.6/50.7	5.5/8.0	39.7/50.7	5.5/8.0	61.7/77.2	14.3/22
Liquid-Suction (flare)**	1/4" - 1/2"	1/4" - 1/2"	1/4" - 5/8"	1/4" - 3/8"		1/4" - 1/2"		3/8" - 5/8"	

Panel: C-KFH1218CA

Panel: C-KFH24CA

Indoor Unit Mix 'n' Match Possibilities

The total capacity for ALL indoor units cannot exceed 150% of the stated condenser capacity. For best performance, the indoor units' total capacity should be 100% or less of the condenser capacity. When a system is sized beyond 100% of the condenser capacity, the

compressor may not provide full capacity for all indoor units: sizing above 100% is generally specified when one or more of the indoor units will not be in use most of the time. Also, the total capacity for ALL indoor units cannot be less than 50% of the condenser's capacity.

Zones	Indoor Units*	Total BTUH
A-KFH18DA 1-2 Units	9K	9,000
	12K	12,000
	18K	18,000
	9K + 9K	18,000
	9K + 12K	21,000
A-KFH24TA 1, 2 or 3 Units	12K	12,000
	18K	18,000
	24K	24,000
	9K + 9K	18,000
	9K + 12K	21,000
	9K + 18K	27,000
	12K + 12K	24,000
	12K + 18K	30,000
	18K + 18K	36,000
	9K + 9K + 9K	27,000
	9K + 9K + 12K	30,000
	9K + 12K + 12K	33,000
	9K + 9K + 18K	36,000
	12K + 12K + 12K	36,000
A-KFH30QA 1, 2, 3 or 4 Units	18K	18,000
	24K	24,000
	9K + 9K	18,000
	9K + 12K	21,000
	9K + 18K	27,000
	12K + 12K	24,000
	12K + 18K	30,000
	18K + 18K	36,000
	9K + 9K + 9K	27,000
	9K + 9K + 12K	30,000
	9K + 12K + 12K	33,000
	9K + 9K + 18K	36,000
	9K + 12K + 18K	39,000
	12K + 12K + 12K	36,000
	12K + 12K + 18K	42,000
	9K + 9K + 9K + 9K	36,000
9K + 9K + 9K + 12K	39,000	
9K + 9K + 12K + 12K	42,000	
A-KFH36QA 1, 2, 3 or 4 Units	18K	18,000
	24K	24,000
	9K + 9K	18,000
	9K + 12K	21,000
	9K + 18K	27,000
	9K + 24K	24,000
	12K + 12K	24,000
	12K + 18K	30,000
	12K + 24K	36,000
	12K + 18K	30,000

Zones	Indoor Units*	Total BTUH
A-KFH36QA 1, 2, 3 or 4 Units	18K + 18K	36,000
	18K + 24K	42,000
	24K + 24K	48,000
	9K + 9K + 9K	27,000
	9K + 9K + 12K	30,000
	9K + 9K + 18K	36,000
	9K + 9K + 24K	42,000
	9K + 12K + 12K	33,000
	9K + 12K + 18K	39,000
	9K + 12K + 24K	45,000
	9K + 18K + 18K	45,000
	9K + 18K + 24K	51,000
	12K + 12K + 12K	36,000
	12K + 12K + 18K	42,000
	12K + 12K + 24K	42,000
	12K + 18K + 18K	48,000
	18K + 18K + 18K	54,000
9K + 9K + 9K + 9K	36,000	
9K + 9K + 9K + 12K	39,000	
9K + 9K + 9K + 18K	45,000	
9K + 9K + 9K + 24K	51,000	
9K + 9K + 12K + 12K	42,000	
9K + 9K + 12K + 18K	48,000	
9K + 12K + 12K + 12K	45,000	
9K + 12K + 12K + 18K	51,000	
12K + 12K + 12K + 12K	48,000	
A-KFH42PA 1, 2, 3, 4 or 5 Units	24K	24,000
	9K + 12K	21,000
	9K + 18K	27,000
	9K + 24K	33,000
	12K + 12K	24,000
	12K + 18K	30,000
	12K + 24K	36,000
	18K + 18K	36,000
	18K + 24K	42,000
	24K + 24K	48,000
9K + 9K + 9K	27,000	
9K + 9K + 12K	30,000	
9K + 9K + 18K	36,000	
9K + 9K + 24K	42,000	
9K + 12K + 12K	33,000	
9K + 12K + 18K	39,000	

Zones	Indoor Units*	Total BTUH
A-KFH42PA 1, 2, 3, 4 or 5 Units	9K + 12K + 24K	45,000
	9K + 18K + 18K	45,000
	9K + 18K + 24K	51,000
	9K + 24K + 24K	57,000
	12K + 12K + 12K	36,000
	12K + 12K + 18K	42,000
	12K + 12K + 24K	48,000
	12K + 18K + 18K	48,000
	12K + 18K + 24K	54,000
	12K + 24K + 24K	60,000
	18K + 18K + 18K	54,000
	18K + 18K + 24K	60,000
	9K + 9K + 9K + 9K	36,000
	9K + 9K + 9K + 12K	39,000
	9K + 9K + 9K + 18K	45,000
	9K + 9K + 9K + 24K	51,000
	9K + 9K + 12K + 12K	42,000
	9K + 9K + 12K + 18K	48,000
	9K + 9K + 12K + 24K	54,000
	9K + 9K + 18K + 18K	54,000
9K + 9K + 18K + 24K	60,000	
9K + 12K + 12K + 12K	45,000	
9K + 12K + 12K + 18K	51,000	
9K + 12K + 12K + 24K	57,000	
9K + 12K + 18K + 18K	57,000	
9K + 18K + 18K + 18K	63,000	
12K + 12K + 12K + 12K	48,000	
12K + 12K + 12K + 18K	54,000	
12K + 12K + 12K + 24K	60,000	
12K + 12K + 18K + 18K	60,000	
9K + 9K + 9K + 9K + 9K	45,000	
9K + 9K + 9K + 9K + 12K	48,000	
9K + 9K + 9K + 9K + 18K	54,000	
9K + 9K + 9K + 9K + 24K	60,000	
9K + 9K + 9K + 12K + 12K	51,000	
9K + 9K + 9K + 12K + 18K	57,000	
9K + 9K + 9K + 18K + 18K	63,000	
9K + 9K + 12K + 12K + 12K	54,000	
9K + 9K + 12K + 12K + 18K	60,000	
9K + 12K + 12K + 12K + 12K	57,000	
9K + 12K + 12K + 12K + 18K	63,000	
12K + 12K + 12K + 12K + 12K	60,000	

All KERR mini-splits are pre-charged with R-410A, an environmentally friendly refrigerant.



KERR CONTROLS LIMITED

Toll Free Phone Number by Branch

Halifax.....	1-800-565-7573
Fulton's Halifax	1-800-565-7569
Dartmouth.....	1-800-373-5377
Truro	1-800-565-5377
Sydney.....	1-800-223-5377
Moncton.....	1-800-561-7905
Fredericton	1-800-442-4938
Charlottetown	1-800-293-5377
St. John's.....	1-800-563-5377
Fulton's St. John's	1-800-563-5553
Corner Brook	1-800-563-6113
London.....	1-888-353-7984
Owen Sound.....	1-877-602-4447
Sudbury	1-888-218-0033

Due to ongoing product improvements, specifications and dimensions are subject to change and correction without notice or incurring obligations. Determining the application and suitability for use of any product is the responsibility of the installer. Additionally, the installer is responsible for verifying dimensional data on the actual product prior to beginning any installation preparations.

Incentive and rebate programs have precise requirements as to product performance and certification. All products meet applicable regulations in effect on date of manufacture; however, certifications are not necessarily granted for the life of a product. Therefore, it is the responsibility of the applicant to determine whether a specific model qualifies for these incentive/rebate programs.



125 POLYMER DRIVE
TRURO, NS B2N 5V2
CANADA

Phone: (902) 895-9281
Fax: (902) 893-4942

www.kerrsmartenergy.com